



**TET ESTEL AS**  
ESTONIA

**June  
2013**

**Series  
D161-200  
D161-200X**

**Rectifier Stud-Mounted  
Diodes  
Type D161-200,  
D161-200X**

Designed for rectifiers and industrial applications.

Maximum mean forward current	I <sub>FAV</sub>	200 A						
Maximum repetitive peak reverse voltage	U <sub>RRM</sub>	1000 ÷ 1800 V						
Reverse recovery time	trr (typ)	20 µs						
U <sub>RRM</sub> , V	1000	1100	1200	1300	1400	1500	1600	1800
Voltage code	10	11	12	13	14	15	16	18
Tvj, °C	- 60 ÷ 175							

**MAXIMUM ALLOWABLE RATINGS**

Symbols and parameters		Units	D161-200 D161-200X	Conditions	
I <sub>FAV</sub>	Mean forward current	A	200 512	Tc=148 °C, Tc=70 °C, 180° half-sine wave, 50 Hz	
I <sub>FRMS</sub>	RMS forward current	A	314	Tc=148°C	
I <sub>FSM</sub>	Surge forward current	kA	5,5 6,0	Tvj=175°C Tvj= 25°C	tp=10 ms UR=0
I <sup>2</sup> t	Limiting load integral	kA <sup>2</sup> s	151 180	Tvj=175°C Tvj= 25°C	
U <sub>RRM</sub>	Repetitive peak reverse voltage	V	1000÷1800	Tj min≤Tvj≤TjM 180° half-sine wave, 50 Hz	
U <sub>RSR</sub>	Non-repetitive peak reverse voltage	V	1100÷1900	Tj min≤Tvj≤TjM 180° half-sine wave tp=10 ms, Single pulse	
T <sub>stg</sub>	Storage temperature	°C	-60÷80		
Tvj	Junction temperature	°C	-60÷175		


**CHARACTERISTICS**

U <sub>FM</sub>	Peak forward voltage	V	1,35	Tvj=25°C, I <sub>FM</sub> =3,14 I <sub>FAV</sub>
U <sub>F(TO)</sub>	Threshold voltage	V	0,72	Tvj=175°C
R <sub>T</sub>	Forward slope resistance	mΩ	0,78	1,57 I <sub>FAV</sub> < I <sub>F</sub> <4,71 I <sub>FAV</sub>
I <sub>RRM</sub>	Repetitive peak reverse current	mA	40	Tvj=175°C, UR= U <sub>RRM</sub>

CHARACTERISTICS				
Symbols and parameters		Units	D161-200 D161-200X	Conditions
Qrr	Recovered charge (typ)	µC	800	Tvj=175°C, If=200A, Ur=100V dir / dt = 10A/µs
trr	Reverse recovery time (typ)	µS	20	
Irrm	Peak reverse recovery current (typ)	A	80	
Rthjc	Thermal resistance junction to case	°C/W	0,12	Direct current

ORDERING					
	D	161	200	X	14
	1	2	3	4	5

1. Diode
2. Design version
3. Mean forward current, A
4. Reverse polarity (cathode stud mounted), without X-normal polarity
5. Voltage code (14 = 1400 V)

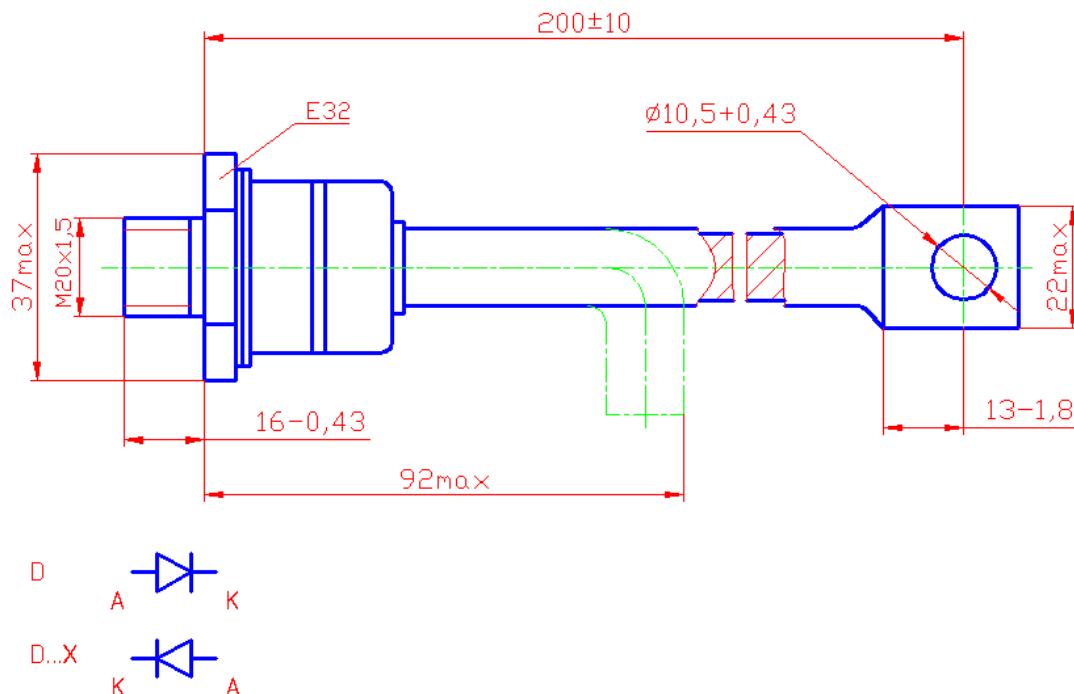

Tightening torque: 24 ÷ 36 Nm  
Weight : 280 grams

Diodes can be supplied in the packages with the framework of 16x1,5 in accordance to the customer.